


LOCUS MAP

NOT TO SCALE

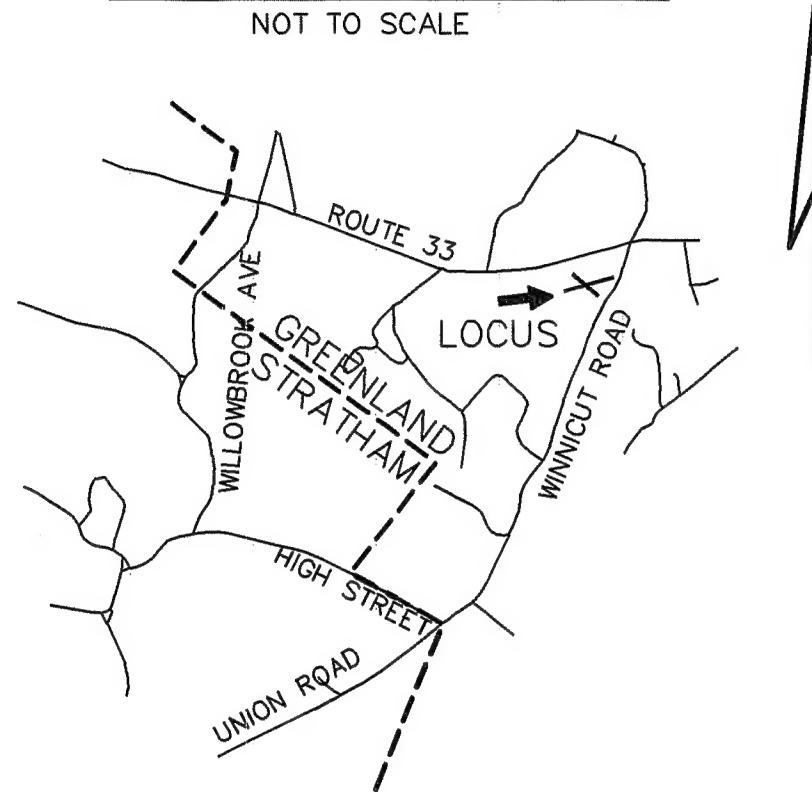

SOIL CLASS: 38 ELDRIDGE

(SOURCE: USDA-SCS SOIL SURVEY)

BENCH MARKS: DATUM = APPROVED PLAN

- #1 SET PK IN UTILITY POLE EL 96.75
- #2 TOP OF VERTICAL NAIL IN 3" MAPLE EL 96.00
- #3 SET HUB ELEV 94.62

DESIGN INTENT:

- THE BOTTOM OF THE EFFLUENT DISPOSAL SYSTEM SHALL BE CONSTRUCTED AT ELEVATION 96.0
- THERE IS/ARE APPROX 12" FT ABOVE ORIGINAL GROUND ON THE HIGH CONTOUR THE DESIGNED EDS. (EL 95.0 PER PREVIOUSLY APPROVED PLAN)

SUITABLE REPLACEMENT AREA:


SYSTEM MUST BE REBUILT IN PLACE OR REDESIGNED.

LEGEND:

- 50' EXISTING CONTOUR
- (50) PROPOSED CONTOUR
- 50.0 EXISTING SPOT ELEVATION
- (50.0) PROPOSED SPOT ELEVATION


NOTES:

- THIS PLAN IS NOT TO BE CONSTRUED AS A BOUNDARY SURVEY. PROPERTY LINES SHOWN ARE APPROXIMATED BASED ON INFORMATION FROM THE FOLLOWING SOURCE:
RCRD 3208-0615 AND ADJUTING SURVEY PLANS
- NHDES-WS&PCD SUBDIVISION APPROVAL N/A PRE-1967 PER PREVIOUS APPVL #CA2003055529
- THIS SYSTEM IS NOT DESIGNED TO HANDLE GARBAGE DISPOSAL, JACUZZI BATH, OR SEWAGE EJECTOR PUMP WASTE. BACKWASH FROM WATER SOFTENER SYSTEMS SHOULD BE DISCHARGED TO A SEPARATE DRYWELL.
- SURFACE WATER FOUND WITHIN 50' OF LEACH FIELD IS BELIEVED TO RESULT FROM EXISTING SYSTEM FAILURE.

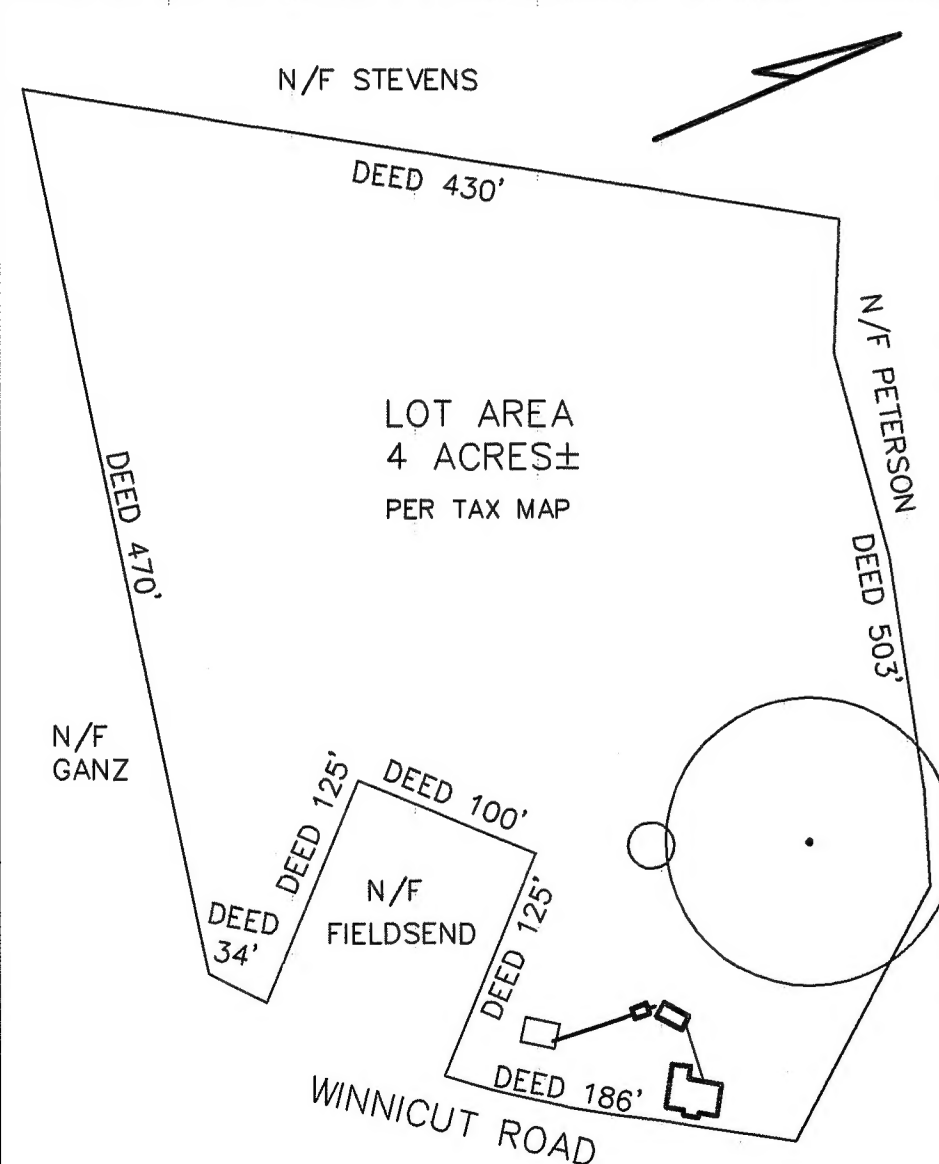

PLOT PLAN

1"=APPROX 100'

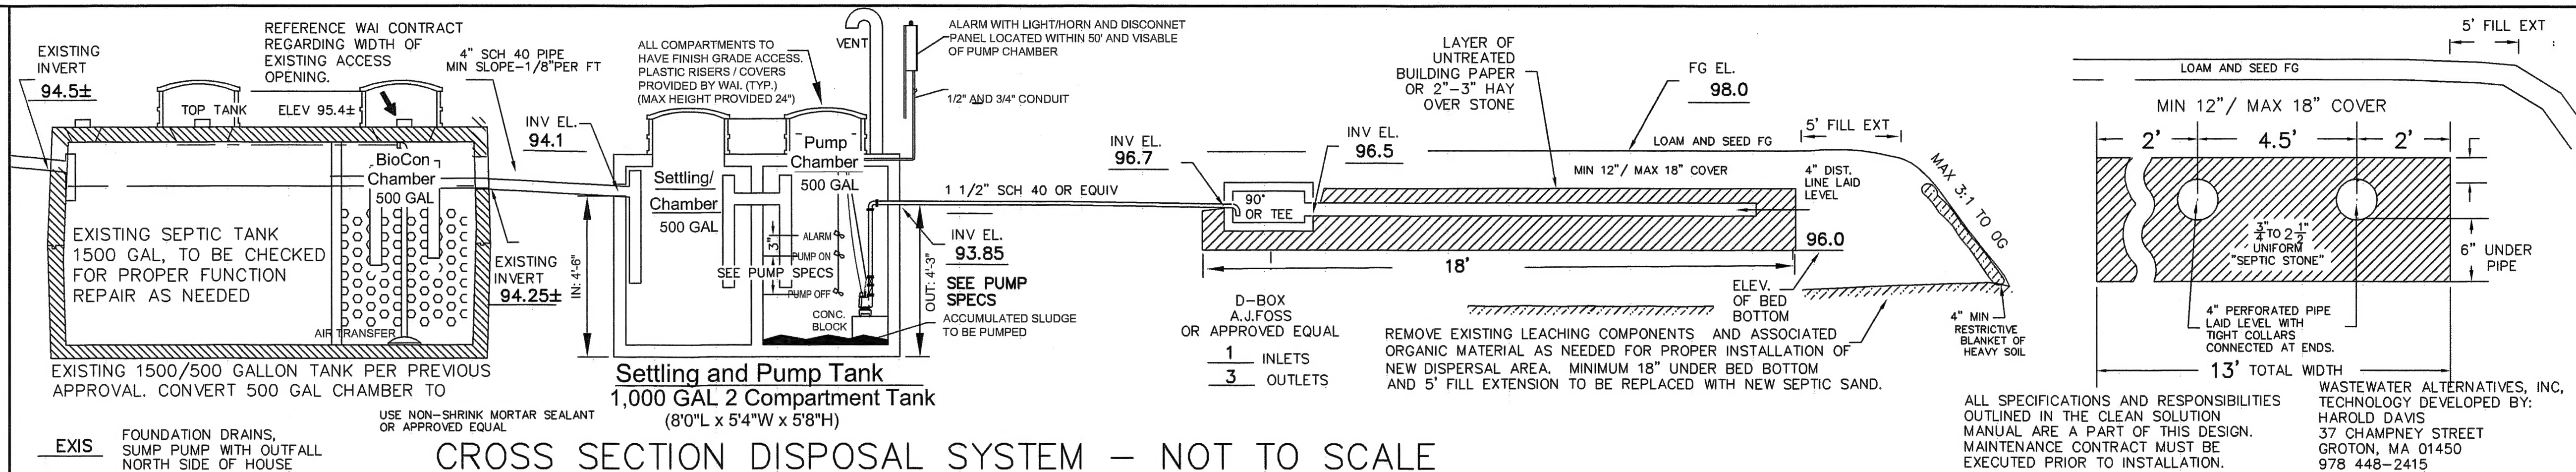

SYSTEM OWNER IS RESPONSIBLE FOR THE FOLLOWING OPERATING REQUIREMENTS

MAINTENANCE CONTRACT SUBMITTED WITH APPLICATION FOR SYSTEM APPROVAL.

ENV-WS 1023.01 (c) SEPTIC TANKS SHALL BE INSPECTED FOR ACCUMULATION OF SLUDGE AND SURFACE SCUM AT LEAST ONCE EVERY YEAR.
(d) WHEN THE COMBINED THICKNESS OF SLUDGE AND SURFACE SCUM IS EQUAL 1/3 OR MORE OF THE TANK DEPTH, THE TANK SHALL BE PUMPED BY A LICENSED SEPTIC TANK PUMPER.
ENV-WS 1023.02 TO PREVENT OBSTRUCTION OF THE DISTRIBUTION LINES AND LEACH FIELD, GREASE AND BULKY WASTE SHALL NOT BE FLUSHED OR OTHERWISE INTRODUCED INTO THE SEPTIC SYSTEM.

ENV-WS 1023.03 TOXIC AND HAZARDOUS MATERIALS SHALL NOT BE FLUSHED OR OTHERWISE INTRODUCED INTO THE SEPTIC SYSTEM.
ENV-WS 1023.04 TO PREVENT DAMAGE TO THE DISTRIBUTION LINES AND LEACH FIELD, VEHICLES, LIVESTOCK, AND OTHER HEAVY OBJECTS SHALL NOT BE ALLOWED ON THE LEACH FIELD.
ENV-WS 1023.05 IF WET AREAS APPEAR ON THE GROUND SURFACE ABOVE THE DISTRIBUTION LINES OR LEACH FIELD OR IF DISAGREEABLE ODORS OCCUR, THE SYSTEM SHALL BE INSPECTED FOR THE SOURCE OF THESE PROBLEMS, AND CORRECTIVE ACTION SHALL BE TAKEN.